

# 烫平机系列

Ironing machine series

YP系列滚筒烫平机具有结构简便合理，熨烫幅度大，能耗低，性能安全可靠等优点。无级变速，用户可根据不同织物的需要及熨平状况选取适合的熨烫速度。物料输送系统采用优质定型宽锭带，避免了宽幅帆布在传送中难于解决的游动现象。烘筒采用优质不锈钢精致而成，具有加快、防腐蚀、织物易干易平等优点。有三种加热方式可选：蒸汽加热、电加热、燃气加热。


YP series roller ironing machine has the advantages of simple and reasonable structure, large ironing range, low energy consumption, safe and reliable performance. Infinitely variable speed, users can select the appropriate ironing speed according to the needs of different fabrics and ironing conditions. The material conveying system uses high-quality shaped wide spindle belts to avoid the swimming phenomenon that is difficult to solve in the transmission of wide canvas. The drying cylinder is exquisitely made of high-quality stainless steel, which has the advantages of speeding up, anti-corrosion, and easy drying of the fabric. There are three heating methods available: steam heating, electric heating, and gas heating.



单辊烫平机  
Single roller ironing machine



双辊烫平机  
Double roller ironing machine

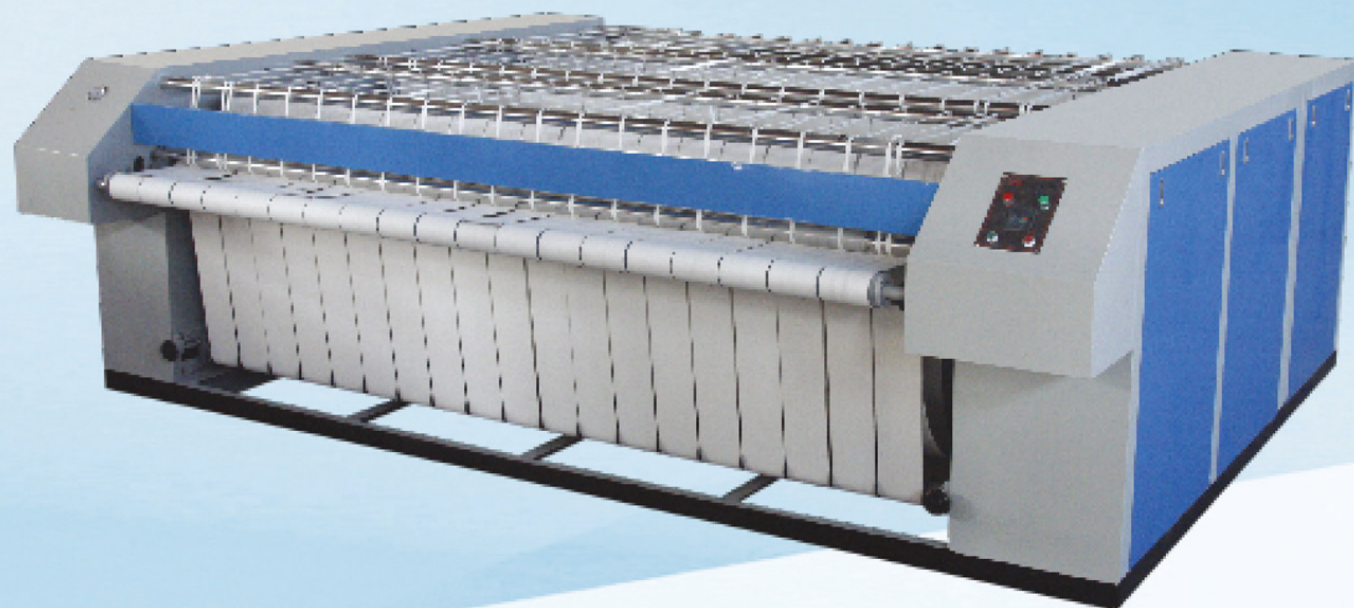


三辊烫平机  
Three-roller ironing machine

烫平机技术参数 Main technical parameter

型号Type	YP I -2500	YP I -2800	YP I -3000	YP II -2800	YP II -3000	YP III -3000	YPV -3000	YPV -3000
熨烫范围(长、宽、厚) Ironing range (mm)	不限 ≤2500 ≤3	不限 ≤2800 ≤3	不限 ≤3000 ≤3	不限 ≤2800 ≤3	不限 ≤3000 ≤3	不限 ≤3000 ≤3	不限 ≤3000 ≤3	不限 ≤3000 ≤3
滚筒数量 Number of rollers (只)	1	1	1	2	2	3	4	5
蒸汽压力 steam pressure (Mpa)	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6
滚筒表面设计温度 Roller surface design temperature (°C)	164°C	164°C	164°C	164°C	164°C	164°C	164°C	164°C
蒸汽消耗量 Steam consumption (kg/h)	70	75	80	150	164	250	320	400
电加热功率 Electric heating power (kw)	24	30	36	60	72			
运行速度 Running speed (m/min)	0-7	0-7	0-7	0-19	0-19	0-28	0-40	0-60
电机功率 Motor Power (Kw)	1.1	1.1	1.1	1.5	2.2	3	3	4
电源 power supply (V)	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ
外型尺寸 Dimensions (mm)	3500 × 1300 × 1280	3800 × 1300 × 1280	4000 × 1300 × 1280	3800 × 2400 × 1280	4000 × 2400 × 1280	4000 × 3400 × 1280	4000 × 4400 × 1280	4000 × 5400 × 1280
整机重量 Total Weight (kg)	900	950	1000	1900	2000	3000	4000	5000



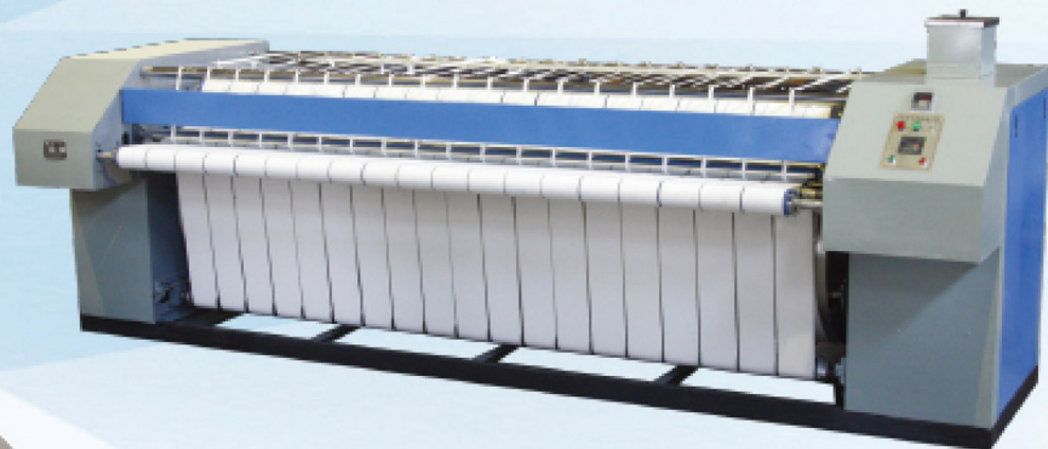

### 燃气烫平机(单滚、双滚)

Gas ironing machine (single roll, double roll)

#### 烫平机技术参数 Main technical parameter

型号Type		YP I -2500	YP I -2800	YP I -3000	YP II -2800	YP II -3000
熨烫范围(长、宽、厚) Ironing range	(mm)	不限 $\leq 2500 \leq 3$	不限 $\leq 2800 \leq 3$	不限 $\leq 3000 \leq 3$	不限 $\leq 2800 \leq 3$	不限 $\leq 3000 \leq 3$
滚筒数量 Number of rollers	(只)	1	1	1	2	2
燃气压力 Gas pressure	(pa)	5000-10000	5000-10000	5000-10000	5000-10000	5000-10000
滚筒表面设计温度 Roller surface design temperature	(°C)	164°C	164°C	164°C	164°C	164°C
燃气消耗量 Gas consumption	(m <sup>3</sup> )	7	8	9	16	18
运行速度 Running speed	(m/min)	0-7	0-7	0-7	0-19	0-19
电机功率 Motor Power	(Kw)	1.1	1.1	1.1	1.5	2.2
电源 power supply	(V)	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ
外型尺寸 Dimensions	(mm)	3500 × 1300 × 1280	3800 × 1300 × 1280	4000 × 1300 × 1280	3800 × 2400 × 1280	4000 × 2400 × 1280
整机重量 Total Weight	(kg)	900	950	1000	1900	2000